

# ! NOTICE !


## !IMPORTANT!

*To avoid accidental engine starting while servicing propeller, it is recommended to set the gear selector to neutral and to disconnect all spark plug wires before any propeller service procedure. Refer to Engine Owner's Manual for important safety precautions when installing propeller.*

**USE** Appropriate Gearcase Adapter Ring on **ALL** installations. The three rings supplied vary in diameter to best fit your motor's gearcase. Choose the proper ring for your application by referencing the Engine manufacturer's name located near each adapter ring.

### **Installation:**

Break ring free from nylon assembly and carefully snap into forward end of propeller as shown.

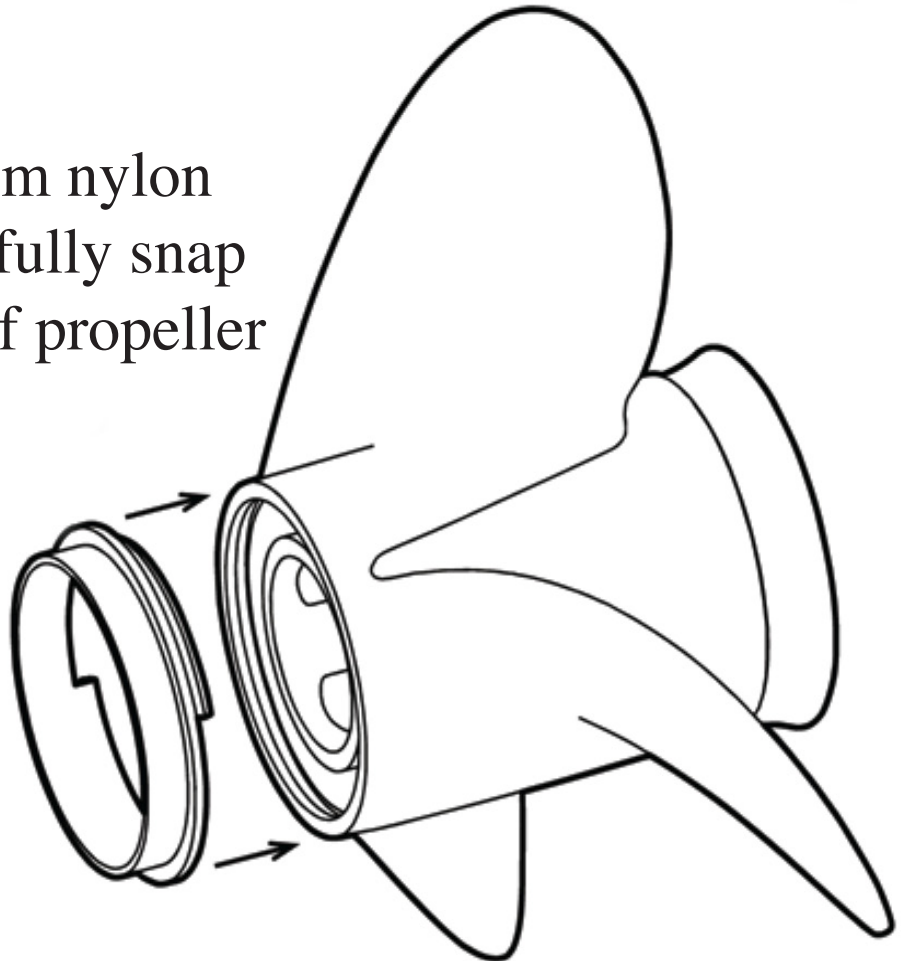

# ! NOTICE !

## !IMPORTANT!

*To avoid accidental engine starting while servicing propeller, it is recommended to set the gear selector to neutral and to disconnect all spark plug wires before any propeller service procedure. Refer to Engine Owner's Manual for important safety precautions when installing propeller.*

**USE** Gearcase Adapter Ring (Included) for Mercury<sup>®</sup>, Mariner<sup>®</sup>, Force<sup>®</sup>, Honda<sup>®</sup>, Yamaha<sup>®</sup>, Nissan<sup>®</sup>, Tohatsu<sup>®</sup>, Johnson<sup>®</sup> 4-Stroke, or Suzuki<sup>®</sup> 4-Stroke applications.

**DO NOT USE** Gearcase Adapter Ring for Evinrude<sup>®</sup>, Johnson<sup>®</sup>, or Suzuki<sup>®</sup> applications.

### **Installation:**

Snap Gearcase Adapter Ring onto forward end of propeller as shown.

